



The Wabash AeroSkirt CX builds on the proven performance and design of our original DuraPlate® AeroSkirt®. The AeroSkirt CX is a lighter-weight and economical trailer side skirt option for truckload and less-than-truckload fleets. It is EPA SmartWay® verified and improves fuel economy up to 6% under SAE J1321 Type II Track Test.

Lightweight and Durable.


The AeroSkirt CX, which weighs approximately 180 pounds, is constructed of lightweight, semi-rigid, glass reinforced thermoplastic that is abrasion, tear and impact resistant. In addition, the composite material is UV and temperature resistant, so it won't fade, discolor, crack, or warp. It is mounted to the trailer using a proprietary spring-bracket system that allows the skirt to flex inward and outward to provide additional damage resistance.

Easy to Install and Maintain.

The Wabash AeroSkirt CX is designed with three panel sections per side to simplify installation and repair. It can be installed in less than two man hours on all makes and models of van trailers. In the event a trailer encounters low ground clearance, our spring-bracket system lets the skirt ride over the obstacle and return to its original position. If the impact is so severe that it causes damage, you can simply replace the damaged section instead of the entire skirt.

Specifications

| | |
|------------------------------------|---|
| Features and Benefits | <ul style="list-style-type: none"> EPA SmartWay verified and CARB compliant Provides up to 6% fuel economy improvement under SAE J1321 Type II Track Test 70 lbs lighter than the Wabash AeroSkirt with DuraPlate Technology Product size and location engineered to fit 53', 48' van trailers and all slide ranges |
| Lightweight, Durable Design | <ul style="list-style-type: none"> Impact and abrasion resistant – made with highly engineered composite panels for optimum flexibility, strength and durability Incorporates a proprietary spring-bracket system, which allows the skirt to flex inward and outward to resist damage Galvanized bracket hardware for corrosion resistance |
| Simple Installation | <ul style="list-style-type: none"> Constructed in panel sections to simplify installation and repair Easy-mount brackets are fastened to crossmembers (4 per side) Panels are attached to mounting brackets Designed for fast and easy installation and repair; installs in under two man-hours |
| Safety | <ul style="list-style-type: none"> Safety tethers attach to crossmembers for additional securement |
| Base Specifications | <ul style="list-style-type: none"> Height: 32" Length: 273" Weight: 180 lbs (90 lbs per side) Ground clearance: 12" Panel material: Glass reinforced thermoplastic composite Color: White (custom colors available) Fits all van trailer makes and models Material is 100% recyclable UV resistant |

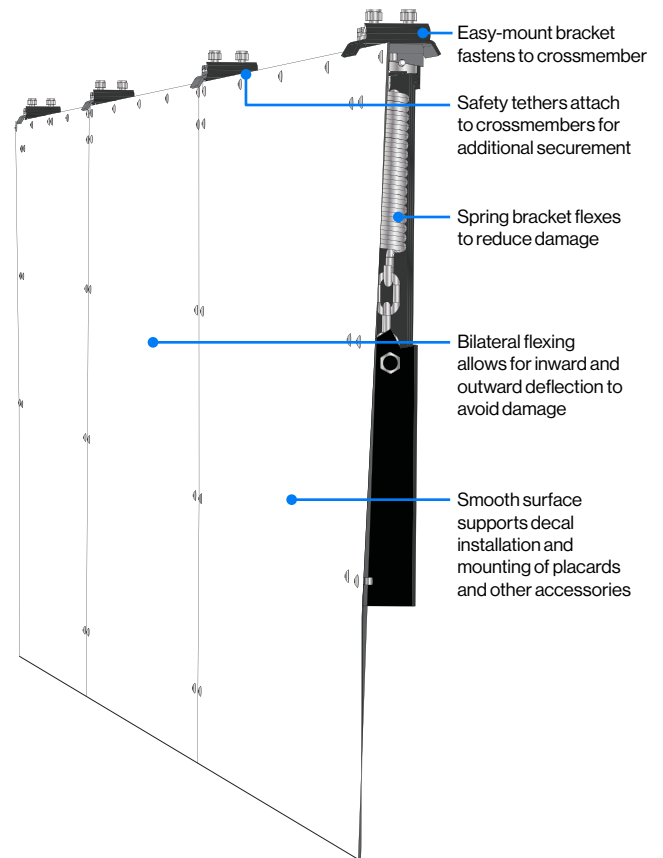

Impact and abrasion resistant – made with highly engineered composite panels for optimum flexibility, strength and durability