

# OPERATOR'S MANUAL



## Dry and Refrigerated Van Trailers

**This manual contains important safety information. Read manual carefully. Keep manual with trailer at all times.**

Part Number: 25001308 Rev. A

---

## **Warranty**

Your Wabash National® trailer warranty is defined in your Purchase Agreement and its detailed Terms and Conditions. If you believe you have a valid warranty claim, please contact your sales representative or Wabash National customer service for assistance.

**Wabash National Warranty Department: (765) 771-5404**


## **Normal Trailer Use Statement**

Your Wabash National® trailer is designed, engineered, and manufactured to provide years of safe, dependable service. To ensure reliable service, the trailer must be properly maintained and used in normal service, free from accident or collision damages. “Normal service” means the loading, unloading and carriage of uniformly distributed legal loads of non-corrosive, properly secured cargo. The vehicle must be operated on well-maintained public roads. Gross vehicle weights must not exceed the labeled gross vehicle weight rating.

## TABLE OF CONTENTS

---

INTRODUCTION .....	1	Brake Air System .....	19
Message to the Owner and Operator .....	1	Anti-Lock Brake System .....	21
Identification .....	1	Foundation Brake System .....	23
How to Use This Operator's Manual .....	3	Air-Ride Suspension .....	26
Trailer Accessories .....	3	Leaf Spring Suspension .....	27
SAFETY .....	4	Hubs .....	28
Safety Instructions .....	4	MAINTENANCE AND LUBRICATION .....	29
Notice .....	5	Lubrication .....	29
Safety Advisory Labels .....	5	Wheel Ends .....	29
SYSTEMS AND FEATURES .....	6	Doors .....	29
Kingpin and Upper Coupler .....	6	Tire Care .....	30
Floor System .....	6	Limiting Factors and Load Limits .....	30
Roof System .....	9	OPERATION .....	31
Doors .....	10	Hookup/Coupling and Uncoupling .....	31
Swing Doors .....	10	Sliding the Tandem .....	32
Overhead Doors .....	11	Refrigerated-Trailer Cooling Unit .....	33
Before Operating .....	12	Safety Appliances .....	33
During Operation .....	12	INSPECTION .....	35
Rear-Impact Guard .....	13	Operator's Pre-Trip Inspection .....	35
Landing Gear .....	14	CONCLUSION .....	37
Operating Instructions .....	15	For More Information .....	37
Electrical System .....	17		
Air Systems .....	18		
Brake System .....	19		



### Message To The Owner And Operator

Congratulations on your new trailer purchase. You have just purchased the highest-quality semi-trailer on the road today. With proper use and maintenance, your Wabash National trailer will give you years of safe, dependable service.

This manual will acquaint you with the operation and maintenance of your Wabash National trailer and highlight important safety information. The information in this publication applies to standard Wabash National specifications only. All variations in specifications cannot be covered in this manual. For operation, maintenance, and service instructions pertaining to components not manufactured by Wabash National, please refer to the component manufacturer's information. Instructional and informational decals shown herein are for example only, were current at the time of publication, and may not exist on your specific trailer based on the components specified and/or used.

Please read this publication carefully and follow these recommendations. It is also important that

you pass this information on to any operators who may use Wabash National trailers.

If you have any questions, do not hesitate to contact your sales representative or the nearest Wabash National Trailer Center location for answers.

Thank you for choosing Wabash National for your trailer needs.

### Identification

The official Vehicle Identification Number (VIN) used for title, registration, and identification purposes is listed on the 5" x 7" silver tag located on the trailer's front wall. The VIN tag also contains information specific to your trailer such as: model, date of manufacture, Gross Vehicle Weight Rating (GVWR), and Gross Axle Weight Rating (GAWR).

When contacting Wabash National, always refer to the VIN to obtain parts, repair information and details related to the trailer warranty.

**NOTE:** *The load ratings for this trailer may not be legal in all states. Check all applicable laws.*

# INTRODUCTION

## Example VIN Tag

MANUFACTURED BY				1000 Sagamore Parkway South Lafayette, IN 47905 Phone: (765) 771-5300		YEAR
						11 (1)
						12 (2)
						13 (3)
VIN				Model Number		MONTH
V.I.N./N.I.V.		1J1V532W8C1122446				JAN (1)
GVWR/PNBV KG:		68,000 lb ( 30909 KG )		COLD INFL PRESS./PRESS. DEGONEA.FROID		FEB (2)
TYPE OF VEHICLE/TYPE DE VEHICULE		TRA/REM VAN DVCVHPC		PSI/LPC KPA		MAR (3)
GAWR/PNBE KG		TIRE/PNEU (LOAD RANGE)		RIM/JANTE		APR (4)
2 @ 20,000 / 9,091 KG		295/75R 22.5 (G)		8.25X22.5		MAY (5)
						JUN (6)
						JUL (7)
						AUG (8)
						SEP (9)
						OCT (10)
						NOV (11)
						DEC (12)
THIS VEHICLE CONFORMS TO ALL APPLICABLE STANDARDS PRESCRIBED UNDER THE CANADIAN MOTOR VEHICLE SAFETY REGULATIONS IN EFFECT ON THE DATE OF ORIGINAL MANUFACTURE.		CE VEHICULE EST CONFORME A TOUTES LES NORMES QUI LUI SONT APPLICABLES EN VERTU DU REGLEMENT SUR LA SECURITE DES VEHICULES AUTOMOBILES DU CANADA EN VIGUEUR A LA DATE DE SA FABRICATION D'ORIGINE.				
THIS VEHICLE CONFORMS TO ALL APPLICABLE FEDERAL MOTOR VEHICLE SAFETY STANDARDS IN EFFECT ON THE DATE OF MANUFACTURE SHOWN ABOVE						
		WARNING 				
		DUE TO STATE AND LOCAL REGULATIONS, THE DIMENSIONS OF THIS TRAILER MAY PROHIBIT USE IN CERTAIN AREAS:				
U.S., Canada, and Mexico patents and patents pending.		EXAMPLE				

## **How To Use This Operator's Manual**

This manual is organized and written for the end user of the trailer. Following these guidelines as well as proper use and maintenance will help to ensure safe, dependable service.

This manual provides valuable information regarding required inspections and maintenance. It also provides important information for safe operation of the trailer. You must read and follow this manual. Do not lose or destroy this valuable reference. If this manual is lost or destroyed, contact your sales representative or the nearest Wabash National Trailer Center location for a replacement.

## **Trailer Accessories**

This manual does not provide information on the installation, inspection, or maintenance of trailer accessories that may have been installed on your trailer during or after manufacture by Wabash National. Such accessories may include, but are not limited to, DuraPlate AeroSkirts® or other aerodynamic assistance devices, toolboxes, or belly boxes.

Please refer to the installation or care manuals provided by the manufacturer of the accessory items for maintenance, inspection, and care instructions relating to those accessories.

# SAFETY

---

## Safety Instructions

- Follow applicable federal, state, provincial, and local laws, rules and regulations.
- Ensure the trailer and its components are properly inspected and maintained.
- Inspect the trailer prior to operation.
- Ensure the trailer brakes are correctly adjusted and functioning properly.
- Ensure all lights are operating properly.
- Exercise extreme caution when entering and exiting the trailer.
- Ensure tires are in good condition and properly inflated.
- Ensure the tractor is properly attached to the trailer.
- Check to ensure the bogie lock pins are fully engaged into the suspension slide rails.
- Visually inspect structural components (i.e., sidewalls, roof, floor, coupler, etc.) for damage and corrosion.
- Never operate the trailer with damaged structural components.
- Never perform maintenance unless you are properly trained.
- Repair and/or replace components with the same type of approved parts.
- It is the responsibility of the driver to back up the vehicle in a safe manner, ensuring the area is clear of people and obstructions.

### **▲ CAUTION:**

***Use extreme caution when backing the trailer and maneuvering. Be aware of blind areas and personnel or unseen hazards.***

- It is illegal and a direct threat to human life to transport people in a trailer.
- Ensure the trailer is properly secured on a firm, level surface when performing trailer maintenance and inspections.
- Make sure to read, understand, and comply with all instructions noted on all labels affixed to the trailer.
- When climbing in and around the trailer, always maintain three points of contact.
- Never climb steps that are not firmly attached or properly maintained.

### **▲ WARNING:**

**Never transport people in a trailer.**

### Notice

The descriptions and specifications contained in this manual were in effect at the time the manual was approved for printing. Wabash National reserves the right to discontinue models at any time, or to change specifications and design without notice and without incurring obligations.

### Safety Advisory Labels

This manual contains Safety Information Advisory Labels to identify potential hazards for persons using, operating, and servicing this trailer. Information preceded by one of these signal words must be observed to minimize the risk of injury to the driver, service personnel, and the general public, as well as to prevent improper service methods that may damage the vehicle or cause it to be unsafe. The following definitions indicate the use of signal words as they appear throughout this manual:

**CAREFULLY FOLLOW THE SAFETY AND OPERATING INSTRUCTIONS IN THIS MANUAL.**

### **▲ WARNING:**

**Activities associated with “▲ WARNING” indicate a potentially hazardous situation, which, if not avoided, may result in death or serious injury.**

### **▲ CAUTION:**

**Activities associated with “▲ CAUTION” indicate a potentially hazardous situation, which, if not avoided, may result in minor or moderate injury. When used without the safety alert symbol, “▲ CAUTION” may be used for property-damage accidents or to warn against unsafe practices.**

Additional **Notes** and **Service Hints** are used to emphasize the importance of a procedure when a specific operation, practice, or condition is essential.

## SYSTEMS AND FEATURES

---

### Kingpin and Upper Coupler

The upper coupler is a heavy fabricated steel assembly attached to the lower front of the trailer, which includes the kingpin. The kingpin provides the connection for pulling by the tractor fifth wheel.

**▲ WARNING:**

**Damage to the kingpin, upper coupler structure and connecting fasteners will compromise the structural integrity of the trailer.**

- Ensure all replacement fasteners are of the same diameter, design, and strength rating as the original equipment manufacture.

**▲ WARNING:**

**Never operate a trailer without first inspecting and verifying a proper coupling.**

A visual inspection is required by law. Some improper couplings can pass a pull test. Sound alone is not reliable. A visual inspection is mandatory.

### Floor System

The trailer floor system includes decking, floor supports/crossmembers, lower sidewalls, and base-rail connection fastener.

Regular inspection of the floor system is important to ensure safe use of the vehicle.

The load rating capacity of a floor system varies depending on the model of your trailer.

Contact your sales representative or the nearest Wabash National Trailer Center to verify the load rating capacity of this trailer.

## SYSTEMS AND FEATURES

### Floor System (cont.)

**▲ CAUTION:**  
***Inspect all floor system components prior to loading and unloading.***

Prior to loading or unloading, verify there are:


- No delaminated and/or broken wood boards
  - No deformed, cracked, or wavy aluminum boards
  - No missing or loose fasteners in decking or base-rail connections
  - No bent and/or cracked crossmembers
  - No cuts or structural damage on lower section of sidewalls
- Do not damage or compromise the integrity of the floor with excessive nailing in a localized region.
  - Use of dock boards and leveling equipment is recommended for forklift entry.
  - Do not expose the floor or body components to corrosive materials and solvents. Transporting corrosives may void the warranty.
  - All flooring repairs must be performed using materials with identical section properties, thickness, and type/specification of wood or aluminum.

### Floor System (cont.)

#### High-Capacity Floor System:

Only Wabash National's High-Capacity Floor System is rated at 35,000 pounds. All other Wabash National flooring systems are rated at lower load rating capacities.

Any trailer with a High-Capacity Floor System is marked and identified on both the exterior and interior walls of the trailer. The decal below is displayed on the rear interior wall of any trailer having a High-Capacity Floor System.

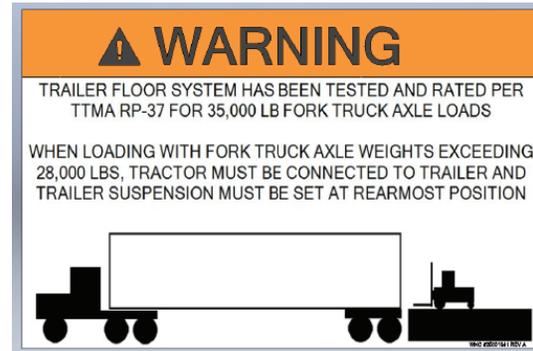

## SYSTEMS AND FEATURES

---

### **▲ CAUTION:** ***Loading***

- Improper loading, load distribution, and cargo securement can damage the floor system.
- Avoid pallets with small footprints to reduce chance of puncture.
- Tandem suspension should be placed in rearmost position when loading.
- Ensure trailer is on a solid, level surface while loading.

### **▲ CAUTION:** ***Load Distribution***

- Cargo should be properly loaded, blocked, and braced to prevent load shifts and to comply with the following sections of Title 49 of the Department of Transportation Federal Motor Carriers Safety Regulations at FMCSA's official web site: [www.fmcsa.dot.gov](http://www.fmcsa.dot.gov)
  - Section 393.100 – General rules for protection against shifting or falling cargo
  - Section 393.102 – Securement Systems
  - Section 393.104 – Blocking and Bracing
  - Section 393.114 – Front-End Structure

### Roof System

The trailer roof system includes roof sheet, roof bows, and fastener connections to the top rail. Regular roof inspections are important to ensure safe operation of the vehicle. Wabash National's standard roof material is an aluminum sheet or optional translucent material. The roof structure is a critical element of the trailer. The roof sheet and roof bows provide stability to the top rails and sidewalls.

#### **▲ CAUTION:**

***Damage to the roof system can cause instability of the upper sidewalls, resulting in buckling and collapse of the trailer***

- When repairing a roof, always use an aluminum sheet or similar-type translucent material of the original thickness.
  - During winter use, remove heavy snow and ice buildup. Parking next to buildings during winter may increase the chances of heavy snow loads.
  - Damaged roofs can cause water leakage, resulting in cargo damage.
- When operating your trailer, ensure proper clearance so the trailer's roof will not strike objects (e.g., bridges, underpasses, garage bay doors, trees, etc.).
  - Prior to loading the trailer, inspect the roof to ensure it does not have cracks, tears, missing rivets, loss of bow bonding to the roof sheet and/or loose roof sheet, or puncture damage.
  - Promptly replace damaged or missing roof bows.

## SYSTEMS AND FEATURES

---

### Doors

#### **▲ WARNING:**

**Be aware that interior cargo may shift or fall when opening the doors.**

#### **Swing Doors**

The trailer swing door system includes door panels with seals, hinges, door-locking hardware, and door tiebacks. Regular inspection of the swing door system is important to ensure safe operation of the vehicle.

The primary function of the doors is to provide a weathertight seal. When properly closed, the rear doors hold the body square and provide structural integrity. It is important that the lock rod hardware draws the doors tight and holds the rear frame square. Swing doors will provide safe, dependable service if routinely inspected and properly maintained.

#### **▲ WARNING:**

**Follow the guidelines below to avoid potentially hazardous situations, that may result in death or serious injury.**

- Always open one door at a time.
- In high-wind conditions, use extreme caution when operating doors.
- Never operate equipment with the trailer doors open except when backing into and/or pulling away from a loading dock.
- Drivers should never position themselves inside the swing path of an open door without first ensuring the door is properly secured.
- Inspect hardware including hinges, door-locking hardware, and door tiebacks to ensure there are no damaged or broken components.
- When doors are open, always ensure the doors are properly secured to the sidewalls with door tiebacks.

- Check doors, hinges, lock rods, and holdback devices for damage or distortion from impact.
- Door seals are subject to wear and damage. They must be routinely checked and repaired or replaced to ensure a tight, weatherproof closure that protects cargo.

### Overhead Doors

The trailer overhead door system includes door panels, tracks, a door-operating assembly, and locking hardware. Regular inspection of the overhead door system is important to ensure safe vehicle operation.

When the overhead door is in operation, the movement is assisted with the help of a pre-tensioned spring. When stopped, a properly counterbalanced door should remain at any given position. If the door leaves the floor by itself when the latch is released, the spring tension is wound too tight. If the door has the tendency to drop when stopped, it should be inspected and adjusted or repaired by qualified personnel.

Be sure to read, understand, and comply with all instructions noted on all labels affixed to the door.

### **▲ WARNING:**

**High-tension springs can cause serious injury or death. All repairs and adjustments must be made by trained service personnel.**

### Before Operating

- Do not manually operate the door with a broken counterbalance spring. The door will not be counterbalanced and will free-fall when opened.
- Inspect all fasteners. Tighten or replace loose fasteners on the lift handle, lock, pull strap, and hinges. Inspect the pull strap and replace it if frayed or damaged.
- Do not tie anything to the pull strap – longer pull straps are available if required.

### During Operation

- Check handle movement. Lubricate the handle with light oil if movement is stiff. Have any worn or damaged latch/locking assembly parts replaced.

## SYSTEMS AND FEATURES

---

### Overhead Doors (cont.)

- Check door movement. If the door is hard to move, lubricate the rollers, counterbalance spring and bearings. Have damaged or worn rollers and hinges replaced. Do not operate the door if it becomes extremely difficult to move. Have a trained mechanic inspect it.
- Check cable attachments. Have frayed, damaged or worn cables replaced. Cable drums should be snug against the bearings.
- Make sure tracks and door openings are not obstructed through the full range of travel.
- Never operate the trailer with the doors open except when backing into a loading dock.

Refer to the Maintenance and Lubrication section for door lubrication information.

#### **▲ CAUTION:**

***The frequency of door maintenance will vary with climate conditions and application.***

## SYSTEMS AND FEATURES

### Rear-Impact Guard

The rear-impact guard consists of vertical and horizontal structural components, a certification label, welds, and hardware. The guard works as a system in conjunction with the trailer's rear frame and understructure.

Your Wabash National trailer rear-impact guard meets and exceeds the requirements of United States Federal Motor Vehicle Safety Standards 49 CFR Sections 571.223 and 571.224 and Canadian Motor Vehicle Safety Standard 223. These standards include requirements for strength, energy absorption, dimensions, and testing. At the time of manufacture, a certification label is placed on the forward-facing surface of the guard horizontal member to verify that it meets all requirements.

#### **⚠ WARNING:**

**It is illegal to replace a missing or damaged certification label without proof that the rear-impact guard in question has been tested to verify that it meets these United States and Canadian safety requirements. Wabash National does not authorize or approve of any party replacing a missing or damaged certification label without seeking the express permission of Wabash National.**

It is extremely important to inspect the rear-impact guard during the driver's daily inspections. Inspect and verify the welds are not cracked, fasteners are intact and secure, and structural components are not buckled or bent. Wabash National fabricates new OEM replacement parts and repair components.

#### **⚠ WARNING:**

**The rear-impact guard must be inspected and properly maintained.**

**Any guard that has been damaged to the point that it no longer complies with the requirements of Federal Motor Vehicle Safety Standards and/or the Canadian Motor Vehicle Safety Standards must be replaced or repaired to its original condition.**



## SYSTEMS AND FEATURES

---

### Landing Gear

The trailer landing gear assembly includes mounting plates, support braces, legs, a cross-shaft, a crank handle, and hardware attaching the various components. Regular inspection is important to ensure safe operation of the landing gear.

The landing gear system has two speeds: high and low. Low gear provides the power necessary for lifting the trailer under load. High gear provides for quick leg extension and retraction without load.

#### **▲ WARNING:**

**Follow the guidelines below to avoid potentially hazardous situations that may result in death or serious injury.**

- Do not uncouple the tractor from the trailer until the landing gear support legs have been extended, contact the ground, and support the weight of the trailer.
- Always park the trailer on a solid, level surface.
- Always ensure the trailer parking brakes are applied or use chock blocks for safety when coupling or uncoupling the trailer.
- After gear selection, ensure full engagement of the input shaft into the crank handle. Do not depend on the retaining bolt to transfer the rotation from the handle to the input shaft.
- Prior to operation, inspect all hardware, including the bolt that attaches the handle to the input shaft.
- Maintain firm footing and grip when cranking. Be especially cautious when standing on slippery surfaces.
- Always stow the handle when not in use.
- Ensure regular maintenance and lubrication according to the component manufacturer guidelines.


## SYSTEMS AND FEATURES

### Landing Gear Operating Instructions


- Push crank handle in for high gear.
- Pull crank handle out for low gear.
- Turn crank:  
Counterclockwise — retract  
Clockwise — extend

**NOTE:** Both inside and outside mounts crank the same.

Additional information related to specific landing gear systems can be reviewed at the appropriate web sites accessible through [www.wabashnational.com](http://www.wabashnational.com).

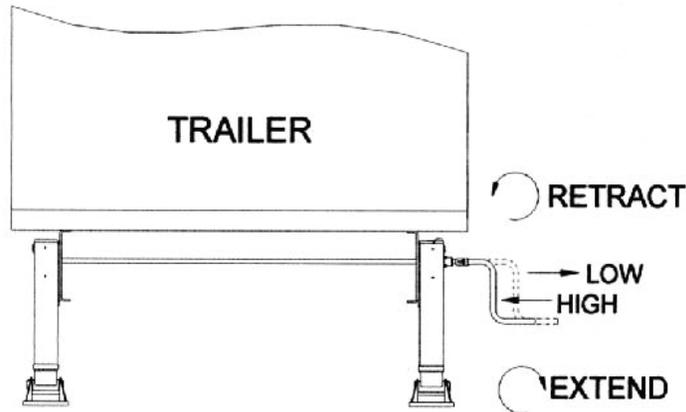

# SYSTEMS AND FEATURES

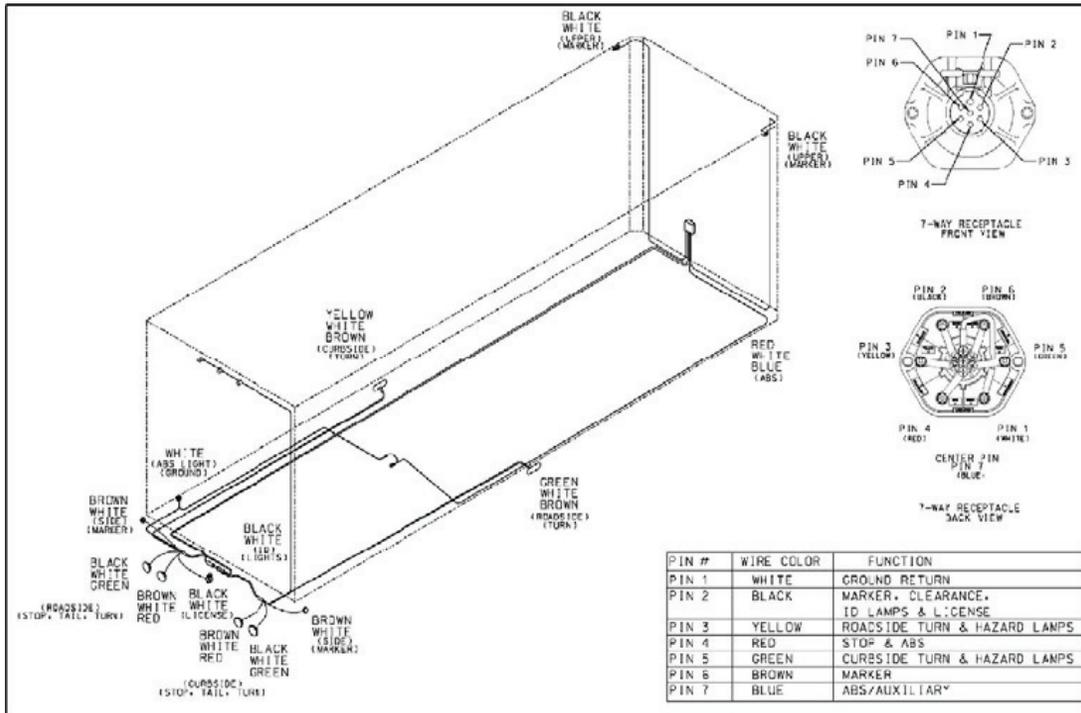

Standard Wabash Wiring Schematic

### Electrical System

The electrical system includes mounting 7-way receptacle, wiring, lamps, and various other accessories. Regular inspection of the system is necessary for the safe operation of the vehicle.

The electrical system of your Wabash National trailer meets or exceeds all federal and state requirements in effect at the time of manufacture.

**NOTE:** *Wabash National's standard front marker lights are PC-rated (visible over 180 degrees) and mounted for protection from damage on the trailer's sides. This mounting arrangement complies with required regulations and satisfies the requirement for lights on the front. (See FMVSS 49 CFR Section 571.108.)*

For the electrical system to operate properly, the tractor must supply a reliable power source of 12 volts DC from the tractor pig-tail to the trailer 7-way receptacle. The 7-way receptacle is equipped with a hinged cover that locks the connection in place and protects it from exposure to dirt and water when not in use.

Wiring for most Wabash National trailers is shown in the illustration on Page 16.

To achieve the best performance and extend the life of the trailer lighting:

- Keep all lamps and reflectors clean for optimum visibility and safety.
- Never use a test probe to pierce wire insulation. Punctures to the wire jacket will allow moisture to collect on the wire strands, corroding critical connections.
- Regularly inspect your wiring junctions and grounds for poor connections and/or corrosion. Clean and grease them with a dielectric grease as necessary.
- Regularly inspect your wiring harness for damage and/or unsupported wiring.
- When maintaining the electrical system, make sure only original components are used.

**▲ CAUTION:**

***Always turn your trailer lights off while positioned at a loading dock.***

**▲ WARNING:**

**Never operate the trailer with any nonfunctioning light.**

## SYSTEMS AND FEATURES

---

### Air Systems

The air systems consist of service and emergency gladhands, plumbing, reservoirs, and brake and suspension valves. Regular inspection of the systems is vital to the safe operation of the vehicle.

One of the most important preventive maintenance practices for operators is the routine draining of all air reservoirs and inspecting for contaminants. Care must be taken to ensure foreign matter does not enter the trailer's air systems through the front gladhands, either from the tractor or open, exposed gladhands. It is recommended that all tractors be equipped with air dryers.

### **▲ CAUTION:**


***Follow the guidelines below to avoid potentially hazardous situations.***

- Constantly monitor tractor air gauges for indications of unusual air consumption.
- Routinely clean gladhand screens and open reservoir petcocks to drain moisture from the tractor and trailer reservoirs.
- Never operate the trailer until air gauges indicate the system is fully charged and stabilized.

## SYSTEMS AND FEATURES

### Brake System

The brake system consists of an air system (reservoir, service valve, emergency valve, and air lines), anti-lock brake system (ABS) (wheel speed sensors, tone rings, warning lamp, electronic and pneumatic control modules), and foundation brakes (slack adjusters, S-cams, brake chambers, and shoes or pads).

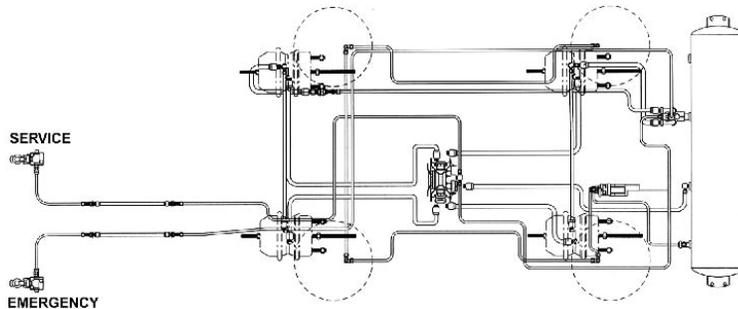

### Brake Air System

Trailer brakes are controlled by the tractor brake system. The trailer brake system has two functional systems: supply (emergency) and service.

The supply system connects with the tractor through the red gladhand. It provides a constant supply of air to the trailer and releases the parking brakes and fills the trailer air reservoir.

The service system connects with the tractor through the blue gladhand. It provides a signal for trailer brake application when tractor brakes are applied. Service brakes apply when the tractor brake pedal is depressed, sending an air signal to the trailer service valve. The relay valve sends reservoir air to the trailer's brake chambers, which then actuate the trailer brakes. When the tractor brake pedal is released, the air signal vents and the brakes are released.

## SYSTEMS AND FEATURES

---

### Brake Air System (cont.)

The trailer is equipped with spring-applied emergency/parking brakes. The brake air chambers have two sections, one of which contains the emergency/parking brake spring. When no supply air is present, the emergency/parking brake springs mechanically apply the brakes.

Trailers are equipped with a spring brake priority emergency valve. This dedicates air to releasing the spring brakes before charging the reservoir and supplying the suspension system. To ensure the reservoir and suspension are properly charged, do not operate the trailer until the tractor air gauges indicate the systems are fully charged and stabilized.

The trailer brakes should be inspected frequently for serviceability. Any missing, broken, or disconnected component is hazardous and could result in an accident or breakdown. The trailer should never be placed in service when any of the listed conditions exist. Trailer brake systems will perform safely and efficiently as long as they are properly maintained as part of a comprehensive maintenance program.

### **▲ WARNING:**

**Do not operate the trailer with any brake defects or with the brakes out of adjustment.**

- Inspect and adjust trailer brakes according to DOT requirements and a preventive maintenance program.
- Inspect the gladhand connection seals and repair as needed.
- Inspect air hoses and connections and repair as needed.
- Never use antifreeze and/or additives in the air system.
- Ensure the tractor is equipped with an air dryer.
- Ensure the tractor and trailer gladhands are free of contamination when coupling.
- Monitor the tractor air gauges for signs of unusual air consumption.
- Check and clean the gladhand screens.
- Routinely open all reservoir petcocks to drain moisture from the reservoirs.

### Anti-Lock Brake System

The trailer's anti-lock brake system (ABS) includes wheel speed sensors, tone rings, warning lamp, and electronic and pneumatic control modules.

The ABS continuously monitors wheel speed and controls braking during extreme braking applications. When the Electronic Control Unit (ECU) detects an extreme braking application, the unit activates the appropriate pneumatic control valve, and brake air pressure is controlled. If the ABS malfunctions, the trailer will have non-ABS-assisted braking. However, it is important to have the system repaired immediately. **Vehicle safety is your responsibility!**


### **▲ WARNING:**

**The ABS indicator light located at the trailer's left rear corner should turn on and off when electrical power is initially applied to the anti-lock brake system. If the lamp does not turn on, it may be defective and must be repaired. If the lamp turns on and remains on while power is continuously applied, the ABS system must be inspected and repaired by a qualified service facility. Failure to take action can result in property damage, serious injury, or death.**

**You must operate your vehicle as safely as possible. While the ABS can help you bring your vehicle to a controlled, safe stop in severe braking situations, ABS cannot compensate for excessive speed, inattentive driving, or improper handling of your vehicle. Safety is up to you.**

## SYSTEMS AND FEATURES

Detailed technical resources for your specific ABS system can be reviewed at the appropriate web sites accessible through [www.wabashnational.com](http://www.wabashnational.com).

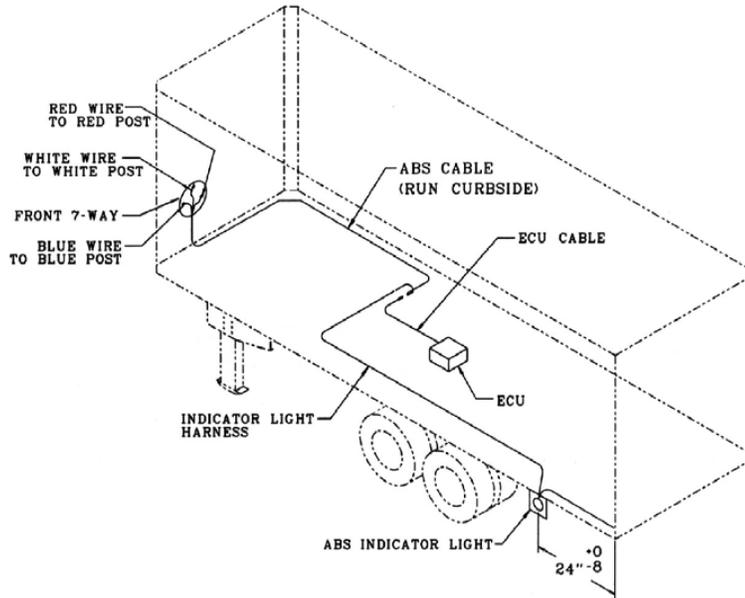

**ABS Electrical System Diagram**

### Foundation Brake System

The foundation brake system consists of brake chambers, slack adjusters, S-cams, and shoes or pads.

During a service brake application, the brake chambers convert air pressure to mechanical force through the slack adjusters and camshafts to apply the brakes. All trailer brake chambers perform both service and parking brake functions. The service brake stops the trailer from a signal from the tractor. The parking brake applies when the driver applies the parking brake. The parking brake also applies automatically when the air supply is unintentionally lost. During routine maintenance or in emergency situations, it may be necessary to move the trailer before air pressure can be restored. In such cases, the mechanical spring brake can be manually backed off and released.



#### **▲ WARNING:**

**Always chock the wheels securely to prevent any trailer movement before releasing the spring parking brakes. See the brake chamber manufacturer's service manual for details on how to manually release the spring brake.**

It is standard practice for most brake chamber suppliers to attach a caging bolt to the exterior housing for emergency purposes.

## SYSTEMS AND FEATURES

### Foundation Brake System (cont.)

To cage the spring:


- a) Remove the plastic end cap.
- b) Insert the special release bolt in the center-hole opening. Be sure the formed end of the bolt engages the piston until it bottoms out.
- c) Turn the release bolt 1/4-turn clockwise and pull the bolt outward to lock the formed end into the piston.
- d) Install a flat washer and release nut on the end of the release bolt and tighten the nut down against the surface.
- e) Using a 3/4" open-end wrench, turn the nut clockwise to tighten against the chamber housing.
- f) While performing this procedure, check the service chamber pushrod to ensure it is retracting.
- g) Continue to tighten the nut clockwise until the spring is fully compressed and the chamber piston is fully retracted.

**NOTE:** To reactivate the spring brake from a released position, perform these steps in reverse order.

### ▲ WARNING:

If the spring brakes are caged or deactivated, the vehicle will not have emergency or parking brakes. The vehicle must not be driven in traffic or not parked without blocking the wheels. It is important to understand that a caged spring brake eliminates the emergency breakaway feature of the system and represents a potential danger.

The trailer should not be released into service while the spring brake is inoperative.

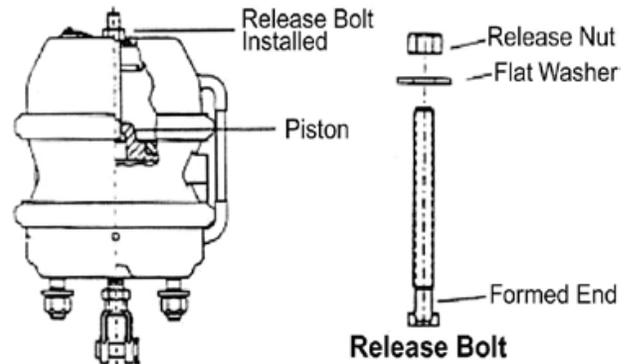


Spring Brake Diagram

### Foundation Brake System (cont.)

#### **▲ WARNING:**

Never attempt to disassemble or repair a spring brake chamber. Serious personal injury could result from accidental sudden release of the high-energy spring.

The slack adjuster functions as a lever in the brake system. It converts the linear force of the brake chamber into torque, which forces the brake shoes against the drums. Trailers are built with automatic slack adjusters. Automatic adjusters ensure constant brake shoe force by maintaining brake shoe to drum clearance.

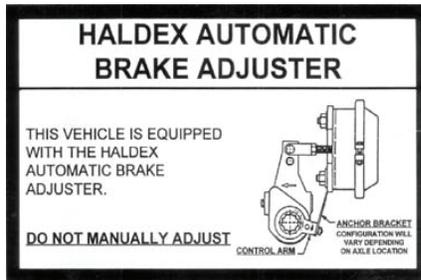

Slack Decal

#### **▲ WARNING:**

Service brakes and parking brakes must be inspected by the driver before and after operation. NEVER operate a trailer with defective brakes.

- Verify the brake chamber plastic end cap is in place to seal out dirt and contaminants.
- Visually inspect all components for broken or missing parts, damage, and corrosion.
- Ensure the service brake chamber clamping ring is secure and damage-free.
- If a defect is suspected, place the vehicle out of service until a qualified mechanic can perform repairs.

#### **▲ WARNING:**

Before entering traffic, check the operation of the trailer brakes to ensure they are in proper working order. Operate the foot pedal, dash control valves, and hand valve to verify the brakes apply and release each time. Listen and be alert for air leaks during each type of brake application.

## SYSTEMS AND FEATURES

---

### **Air-Ride Suspension**

The air-ride suspension system consists of frame brackets, suspension links, axle connections, air springs, shock absorbers, and a height control valve.

The air-ride suspension is designed to provide a level, cushioned ride throughout all legal load ranges. The height control valve maintains the suspension ride height by regulating air to the air springs. Trailers are equipped with a spring brake priority emergency valve. This dedicates air to releasing the spring brakes first, before charging the reservoir and supplying air to the suspension system. To ensure the reservoir and suspension are properly charged, do not operate the trailer until the tractor air gauges indicate the system is fully charged and stabilized.

In compliance with DOT requirements, the suspension system should be inspected before and after operation:

- Check each air spring to verify sufficient inflation. Fill each spring to equal firmness and verify there is no physical damage present.
- Check all shock absorbers for leaking or damage.
- Check the height control valve to ensure the linkage is properly connected.

Additional information related to maintenance and operation of a specific suspension system can be reviewed at the appropriate web sites accessible through [www.wabashnational.com](http://www.wabashnational.com).

## SYSTEMS AND FEATURES

### Leaf Spring Suspension

The leaf spring suspension consists of spring hangers, spring seats, equalizer bushings, leaf spring assemblies, torque arms, and U-bolts.

Care and maintenance are required to ensure satisfactory service life. The springs must be tightly clamped to the spring seat and axle to prevent any movement between U-bolts. Excessive movement can result in misalignment of axles. It is important

that spring U-bolts be checked for proper tightness regularly. Leaf spring suspension inspection and maintenance requirements are available at the component manufacturer web sites accessible through [www.wabashnational.com](http://www.wabashnational.com).

For example, the Hutchens suspension's torque requirements are reflected in the diagram below. Make sure you follow the manufacturer's requirements for your specific make and model of suspension.

 **WARNING**

**SAFETY ALERT! (1) FOLLOW ALL TORQUE REQUIREMENTS. (2) DO NOT USE ANY COMPONENT WITH VISIBLY WORN OR DAMAGED THREADS. FAILURE TO FOLLOW THESE SAFETY ALERTS CAN LEAD TO LOSS OF VEHICLE CONTROL, PROPERTY DAMAGE, SERIOUS PERSONAL INJURY OR DEATH.**

**Hutchens Suspension Torque Requirements  
9600-9700 Series ( Decal Part Number 16086-01 Rev. J )**

After an initial break in period, approximately 1000 miles, and at least every 4 months periodically thereafter, ALL bolts and nuts should be checked to insure that recommended torque values are being maintained.

Oiled torque values listed are for new fasteners with lubricated threads. It is recommended that new installations be performed with oiled fasteners. For dry threads which have been in service, use the higher torque values which are noted below.

	OILED	DRY
1 1/8-7 ( 9600 / 9700 Rocker Bolt ) .....	590 lb-ft	790 lb-ft
1-14 or 1-8 ( 9700 Radius Rod Bolt ) .....	540 lb-ft	720 lb-ft
7/8-14 ( Axle U-Bolts & 9600 Radius Rod Bolt ) .....	350 lb-ft	470 lb-ft
3/4-16 ( Axle U-Bolts ) .....	310 lb-ft	420 lb-ft
5/8-18 ( Radius Rod Clamp Bolt ) .....	130 lb-ft	170 lb-ft
5/8-18 ( Spring Retainer Bolt ) .....	35 lb-ft	50 lb-ft



Hutchens Industries, Inc., P.O. Box 1427, Springfield, Missouri 65801-1427 Toll Free 1 (800) 654-8824

## SYSTEMS AND FEATURES

---

### Hubs

**▲ WARNING:**

**Cracked wheels, loose nuts, or missing studs are extremely hazardous and may cause accidents or breakdowns.**

**Check hub gaskets and seals for lubrication leaks before each trip. Leaking seals can cause damaged wheel bearings and possible failure of the wheel-end assembly.**

Hubs should be mounted and balanced properly and in accordance with the hub manufacturer's instructions prior to operation of the trailer. Instructions are available at the component manufacturer web sites accessible through [www.wabashnational.com](http://www.wabashnational.com).

## MAINTENANCE AND LUBRICATION

### LUBRICATION

#### Wheel Ends

Two types of lubrication are used in wheel ends: oil or semi-fluid grease. If oil is used, check the oil level in all hubs before every trip. Add oil when low, but only to the level indicated by the mark on the hubcap face. Too much oil may cause leaks.

Semi-fluid grease will be indicated by a label on the wheel end or trailer. There will be no oil level viewing window in the hubcap. Even though there is no way to visually check the lubrication level, you must still inspect the wheel ends before every trip to ensure that there are no lubrication leaks. Grease around the inner hub seal or grease contamination on the inside of a wheel and tire indicates a possible leak and requires immediate service.

Wabash National recommends compliance with TMC Recommended Practice No. 631A with respect to wheel-end-lubrication inspection, maintenance, and service. This Recommended Practice states that a hub should be filled with semi-fluid grease to the 3 o'clock-and-9 o'clock level (cavity filled 50% full).

#### **▲ WARNING:**

**Follow the guidelines below to avoid potentially hazardous situations that may result in death or serious injury.**

- Never mix oil and semi-fluid grease in the same wheel end.
- Always use the same type of oil or semi-fluid grease in the same wheel end.
- Consult your local lubricant supplier for product recommendations.

#### Doors

Lubricate the door counterbalance, bearings, rollers, hinges, and locking handle regularly with a dry spray lubricant according to manufacturer's recommendations. When lubricating, wipe dirt residue and buildup from the roller tracks. Do not use any petroleum-based lubricant on the rubber door seals. Additional operation and maintenance information for your specific door system can be reviewed at the appropriate web sites accessible through [www.wabashnational.com](http://www.wabashnational.com).

#### **▲ CAUTION:**

***The frequency of door maintenance will vary with climate conditions and use.***

## MAINTENANCE AND LUBRICATION

---

### Tire Care

#### Limiting Factors and Load Limits

Always maintain proper tire pressure and stay within tire load limits. Tire pressure should be measured when tires are cold. The total load capacity per tire must not exceed the tire manufacturer's specified load rating. Each tire has its size, load rating, and maximum pressure molded in the sidewall face. The Vehicle Identification Number (VIN) plate on the front wall of your trailer also provides the Gross Axle Weight Rating (GAWR), tire size, load rating, and inflation pressure.

#### **▲ WARNING:**

**Follow the guidelines below to avoid potentially hazardous situations that may result in death or serious injury.**


- Inspect the tires for nails and other objects embedded in the rubber.
- Inspect the treads for stones and other objects lodged between duals.
- Inspect the tires for abrasions, cuts, dry rot, or other damage.
- Inspect the condition of the treads to ensure proper, even wear and DOT tread-depth compliance.
- Check that the dual tires on any axle end are of the same diameter.
- Inspect the tire valve stems for damage and missing valve caps.
- Never operate equipment with tires that have low or no pressure.
- When replacing tires and rims, make sure they are replaced with the same size, type, and load rating.

### Hookup/Coupling and Uncoupling

Never operate a tractor/trailer combination that is not properly coupled.

Inspect the trailer coupler and kingpin for damage, cracking, excessive corrosion, and wear.


Position the tractor directly in front of the trailer, never back under the trailer at an angle. This can result in damaged landing gear.

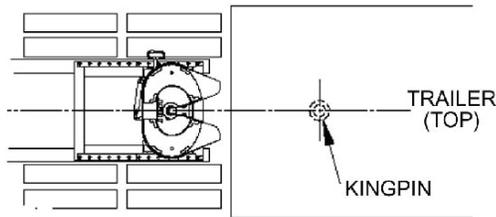

Inflate tractor air suspension and back up **close** to the trailer centering the kingpin with the throat of the fifth wheel and **STOP!**

Adjust the trailer height so that the trailer contacts the fifth wheel approximately 6" behind the pivot. **IMPORTANT!** When coupling, you must lift the

trailer to ensure proper engagement of the kingpin to the fifth wheel.

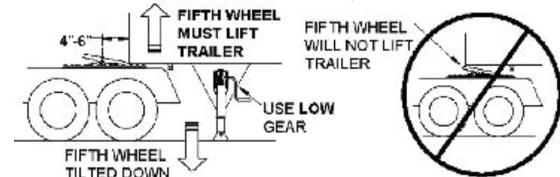

Adjust trailer height so that the fifth wheel will lift the trailer.

Back up the trailer carefully, slowing to a near stop until the fifth wheel locks.

Pull forward in low gear to test the coupling. This initial check also confirms the trailer parking brakes are applied.

### **▲ WARNING:**

**Never operate a trailer without first visually inspecting and verifying a proper coupling.**

**A visual inspection is required by law. Some improper couplings can pass a pull test. Sound alone is not reliable. A visual inspection is mandatory.**

## OPERATION

---

### Hookup/Coupling and Uncoupling (cont.)

- Visually inspect the coupling using a flashlight.
  - Ensure there is no space between the upper coupler and fifth wheel.
  - Ensure the fifth wheel jaws have closed around kingpin shank.
  - Ensure the locking lever is in the “locked” position.
- Inspect and connect the air lines and electrical cord, ensuring proper clearance.
- Fully retract the landing gear and stow the crank handle. Use low gear until the legs are no longer in contact with the ground.

### Sliding the Tandem

Most Wabash National trailers have sliding tandems to allow for bridge law compliance, maneuverability, or to comply with loading dock safety requirements. Sliding tandems are held in place by a locking pin mechanism operated by a pull handle or air-operated control.

### **▲ CAUTION**

***Exercise caution when repositioning the tandem location.***

#### The proper method of sliding a tandem

1. The driver should position the tractor and trailer in a straight line on level ground and note the position of the vehicle in reference to how far the trailer should travel before reaching the desired tandem position.
2. The driver must set the parking brakes and proceed to the bogie lock pin release handle.
3. After assuming a safe, firm stance, the driver should manually disengage the bogie lock pins.
4. After returning to the tractor, the driver should ease forward or backward in the lowest gear range available (walking speed) to the desired suspension location. If the bogie lock pins are in a bind and the tandem fails to slide, it may be necessary to apply minimal force in a forward and rearward direction to allow the locking pins to completely disengage. The driver must be prepared to stop immediately upon low-speed contact with the front or rear stop bar.

### Sliding the Tandem (cont.)

5. Once the tandems have been repositioned and the tractor's parking brakes are set, the driver must visually inspect and verify all locking pins are fully engaged in the slide rails and the handle is in the locked position. The trailer can then be operated.
6. Only when there is minimal traction from rain, snow, or gravel it may be necessary to apply the trailer parking brakes while traveling at a minimal speed. This practice aids in breaking the friction between the tandem and slide rails and is acceptable as long as the driver slows to a creep just before contacting either the forward or rear stop bar.

An example of a trailer sliding tandem warning label can be found on Page 34.

### Refrigerated-Trailer Cooling Unit

If your Wabash National trailer is a refrigerated van, it is essential that you inspect and maintain your refrigeration unit according to the manufacturer's recommendations. Detailed technical resources for your specific cooling unit can be reviewed at the appropriate web sites found through [www.wabashnational.com](http://www.wabashnational.com).

### Safety Appliances

Use all steps and handholds with extreme caution. Such components are subject to wear, damage, and environmental conditions. Do not use these components unless they are firmly attached and properly maintained. Use extreme caution when steps are wet. Remove ice prior to use. Steps and handholds are not provided for performing maintenance on the cooling unit.

- Never climb steps that are not firmly attached or properly maintained.
- Use extreme care when stepping on/off trailer steps. Use common sense, and step on only supported, nonslip surfaces.

## OPERATION

### **WARNING**

**FAILURE TO LOCK THE SLIDING SUSPENSION CAN CAUSE A LOSS OF VEHICLE CONTROL, DEATH, SERIOUS BODILY INJURY, AND PROPERTY DAMAGE.**

#### **Hutchens Slider Series ( Decal Part Number 16088-01 Rev. D )**

THIS TRAILER IS EQUIPPED WITH A SLIDING SUSPENSION THAT MUST BE SECURELY LOCKED PRIOR TO OPERATION. THE SLIDING SUSPENSION IS LOCKED WHEN THE MAIN BODY OF EACH LOCK PIN EXTENDS THROUGH THE HOLES IN THE RAILS. BEFORE PULLING THE TRAILER, THE SLIDING SUSPENSION MUST BE CAREFULLY INSPECTED TO ENSURE IT IS PROPERLY POSITIONED AND THE MAIN BODY OF EACH LOCK PIN DOES EXTEND THROUGH THE HOLE IN THE RAILS. BEFORE PULLING THE TRAILER, APPLY TRAILER BRAKES AND GENTLY ROCK TRAILER BACKWARDS AND FORWARDS TO ENSURE SLIDING SUSPENSION IS SECURE.

#### **TO POSITION THE SLIDING SUSPENSION:**

1. Set both tractor and trailer brakes.
2. Remove locator bar from behind slider and move to desired location.
3. To release the lock pins, pull operating handle all the way out and lock in place.
4. Release the tractor brakes and carefully drive forward or backward until the sliding suspension is at the desired location.
5. Release operating handle and visually check all lock pins for locking. The main body of each lock pin must extend through the holes in the rails.
6. Lock locator bar in both body rails immediately behind slider.
7. With the trailer brakes applied, gently rock trailer backward and forward to ensure sliding suspension is properly locked and follow procedures set out above before pulling the trailer. The lock pins must be checked at each stop to ensure each is locked.



**Hutchens Industries, Inc., P.O. Box 1427, Springfield, Missouri 65801-1427 Toll Free 1 (800) 654-8824**

### Operator's Pre-Trip Inspection

The following pre-trip inspection checklist provides a guide to owners and operators of Wabash National trailers. Operators are responsible for making sure that only safe vehicles are operated on public roads. Drivers must inspect the complete trailer before the start of every trip. The pre-trip inspection should include, but not be limited to, the following items:

- Make sure the vehicle has current registration, DOT inspection, license plate, and bill of lading.
- Verify the fifth wheel is engaged and locked.
- Inspect the electrical connector and verify it is fully seated. Make sure the cord is unobstructed and not damaged.
- Inspect the air hoses/gladhands for chafing, defective seals, and/or leaking.
- Make sure the landing gear legs are fully raised and the handle is stowed securely.
- Turn on all lights and 4-way flashers. Inspect and clean all lights and reflective tape.
- When applicable, inspect the sliding tandem lock pins to ensure full engagement. Check that the hold-down brackets are in place and not damaged.
- Ensure the trailer brakes, including the ABS system, are properly adjusted and the system is functioning properly.
- Inspect the trailer rims for any defects and loose or missing lug nuts.
- Ensure proper wheel-end lubrication. Check hub gaskets and seals for lubrication leaks. If a leak is evident, maintenance is required.
- Inspect the trailer tires for damage, tread depth, and proper inflation.
- Ensure that the splash guards/mud flaps are intact and securely attached.
- Make sure all doors are secured.
- Inspect the rear-impact guard to ensure welds are not cracked, fasteners are intact and secure, and structural components are not buckled or bent.

## INSPECTION

---

### Operator's Pre-Trip Inspection (cont.)

- When driving away, apply the trailer brakes and gently rock the trailer backward and forward. Make sure the sliding undercarriage is properly locked. Exit the truck cab and again visually check to verify proper pin engagement.
- Ensure overall trailer safety.

**⚠ WARNING:**

**Always follow the vehicle and component manufacturer's instructions when operating sliding undercarriages.**

**⚠ WARNING:**

**Any motor vehicle should not be operated in such a condition as to likely cause an accident or breakdown of the vehicle.**

The above list is not all-inclusive. Operators are responsible for ensuring the truck and trailer comply with all applicable DOT regulations.

### **For More Information**

With regular care and maintenance, your Wabash National trailer will provide years of safe and dependable use. If you have a question regarding your trailer, please contact your sales representative or Wabash National Customer Service at (765) 771-5300.

For maintenance and operation information for a specific system or component, check the appropriate web sites accessible through [www.wabashnational.com](http://www.wabashnational.com).

Your trailer was engineered, manufactured, and inspected to ensure compliance with all applicable Department of Transportation (DOT) safety requirements. If you detect a defect that could cause an accident or injury, or if you wish to report an accident or injury, please contact Wabash National Warranty at (765) 771-5404.

Thank you for selecting a Wabash National trailer. Always inspect, maintain, and operate your Wabash National trailer with safety as the number-one priority.

